


## Čtvercový průřez

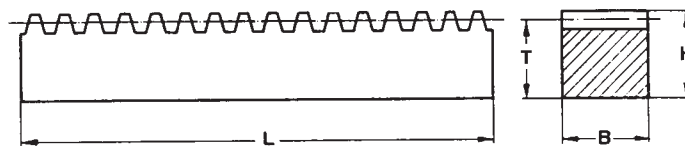


Objednací číslo	Modul	L	B	T	H	Materiál	Hmotnost [kg]
111000 ST	1,00	1000	10	9,0	10	ocel	0,75
112000 ST	1,00	2000	10	9,0	10	ocel	1,50
101000 ST	1,00	1000	15	14,0	15	ocel	1,64
102000 ST	1,00	2000	15	14,0	15	ocel	3,20
151000 ST	1,50	1000	17	15,5	17	ocel	2,05
152000 ST	1,50	2000	17	15,5	17	ocel	4,10
201000 ST	2,00	1000	20	18,0	20	ocel	2,75
202000 ST	2,00	2000	20	18,0	20	ocel	5,50
251000 ST	2,50	1000	25	22,5	25	ocel	4,00
252000 ST	2,50	2000	25	22,5	25	ocel	8,00
301000 ST	3,00	1000	30	27,0	30	ocel	6,50
302000 ST	3,00	2000	30	27,0	30	ocel	13,00
401000 ST	4,00	1000	40	36,0	40	ocel	11,00
402000 ST	4,00	2000	40	36,0	40	ocel	22,00
501000 ST	5,00	1000	50	45,0	50	ocel	16,00
502000 ST	5,00	2000	50	45,0	50	ocel	32,00
601000 ST	6,00	1000	60	54,0	60	ocel	24,50
602000 ST	6,00	2000	60	54,0	60	ocel	49,00

Prodej jiných délek max. 4m a jiných průřezů na poptávku.

Provedení v materiálu 1.4305 a C45 na poptávku.

Na poptávku lze dodat v provedení pro průběžnou montáž (MC).

## Kruhový průřez

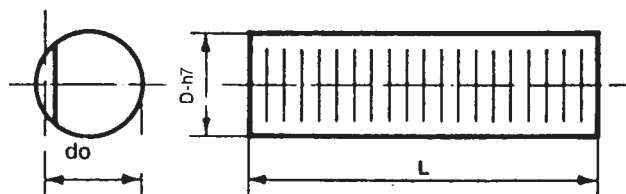

Objednací číslo	Modul	L	D h7	do	Materiál	Hmotnost [kg]
R 101000 ST	1,00	1000	10	9,0	ocel	0,55
R 102000 ST	1,00	2000	10	9,0	ocel	1,10
R 151000 ST	1,50	1000	15	13,5	ocel	1,33
R 152000 ST	1,50	2000	15	13,5	ocel	2,66
R 201000 ST	2,00	1000	20	18,0	ocel	2,31
R 202000 ST	2,00	2000	20	18,0	ocel	4,62
R 251000 ST	2,50	1000	25	22,5	ocel	3,38
R 252000 ST	2,50	2000	25	22,5	ocel	6,76
R 301000 ST	3,00	1000	30	27,0	ocel	5,12
R 302000 ST	3,00	2000	30	27,0	ocel	10,24
R 401000 ST	4,00	1000	40	36,0	ocel	9,09
R 402000 ST	4,00	2000	40	36,0	ocel	18,18
R 501000 ST	5,00	1000	50	45,0	ocel	13,54
R 502000 ST	5,00	2000	50	45,0	ocel	27,08

Možnost dodání také v nerezovém provedení (1.4305) s tolerancí Dh9.